



DC-鼓风机风扇

50x50x20mm-1

马达可选功能列表 (Available Functions)

1.马达保护 (Motor protection)

AS

2.信号输出 (Signal output)

FG

RD

3.调速方式 (Speed control mode)

PWM


TC




风扇单重:33g (weight:33g)



风扇P-Q曲线 / Fan performance curve

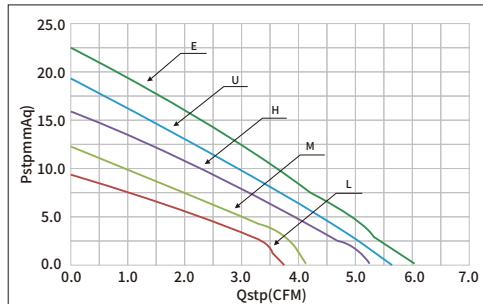

尺寸图 / DIMENSIONS DRAWING

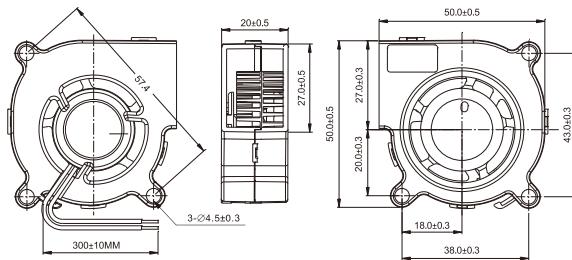

Model		Bearing	Rated Voltage	Startup Voltage	Current	Power	Speed	Air Flow		Static Pressure		Noise
型号	Part NO.	轴承	工作电压	启动电压	电流	功率	转速	M³/min	CFM	mmH₂O	INH₂O	dBA
HBH0505EC-1	-A	Hydraulic	5	4.0	0.41	2.05	5500	0.17	6.03	22.43	0.88	39.3
HBH0505UC-1	-A			4.0	0.38	1.90	5000	0.16	5.64	19.19	0.76	36.0
HBH0505HC-1				4.0	0.23	1.15	4500	0.15	5.27	15.75	0.62	34.3
HBH0505MC-1				4.0	0.19	0.95	4000	0.12	4.12	12.18	0.48	31.8
HBH0505LC-1				4.0	0.15	0.75	3500	0.11	3.76	9.23	0.36	30.5
HBB0505EC-1	-A	Ball	5	4.0	0.41	2.05	5500	0.17	6.03	22.43	0.88	39.3
HBB0505UC-1	-A			4.0	0.38	1.90	5000	0.16	5.64	19.19	0.76	36.0
HBB0505HC-1				4.0	0.23	1.15	4500	0.15	5.27	15.75	0.62	34.3
HBB0505MC-1				4.0	0.19	0.95	4000	0.12	4.12	12.18	0.48	31.8
HBB0505LC-1				4.0	0.15	0.75	3500	0.11	3.76	9.23	0.36	30.5
HBH0512EC-1		Hydraulic	12	5.0	0.25	3.00	5500	0.17	6.03	22.43	0.88	39.3
HBH0512UC-1				5.0	0.18	2.16	5000	0.16	5.64	19.19	0.76	36.0
HBH0512HC-1				5.0	0.14	1.68	4500	0.15	5.27	15.75	0.62	34.3
HBH0512MC-1				5.0	0.13	1.56	4000	0.12	4.12	12.18	0.48	31.8
HBH0512LC-1				5.0	0.12	1.44	3500	0.11	3.76	9.23	0.36	30.5
HBB0512EC-1		Ball	12	5.0	0.25	3.00	5500	0.17	6.03	22.43	0.88	39.3
HBB0512UC-1				5.0	0.18	2.16	5000	0.16	5.64	19.19	0.76	36.0
HBB0512HC-1				5.0	0.14	1.68	4500	0.15	5.27	15.75	0.62	34.3
HBB0512MC-1				5.0	0.13	1.56	4000	0.12	4.12	12.18	0.48	31.8
HBB0512LC-1				5.0	0.12	1.44	3500	0.11	3.76	9.23	0.36	30.5
HBH0524EC-1		Hydraulic	24	12.0	0.15	3.60	5500	0.17	6.03	22.43	0.88	39.3
HBH0524UC-1				12.0	0.11	2.64	5000	0.16	5.64	19.19	0.76	36.0
HBH0524HC-1				12.0	0.09	2.16	4500	0.15	5.27	15.75	0.62	34.3
HBH0524MC-1				12.0	0.08	1.92	4000	0.12	4.12	12.18	0.48	31.8
HBH0524LC-1				12.0	0.07	1.68	3500	0.11	3.76	9.23	0.36	30.5
HBB0524EC-1		Ball	24	12.0	0.15	3.60	5500	0.17	6.03	22.43	0.88	39.3
HBB0524UC-1				12.0	0.11	2.64	5000	0.16	5.64	19.19	0.76	36.0
HBB0524HC-1				12.0	0.09	2.16	4500	0.15	5.27	15.75	0.62	34.3
HBB0524MC-1				12.0	0.08	1.92	4000	0.12	4.12	12.18	0.48	31.8
HBB0524LC-1				12.0	0.07	1.68	3500	0.11	3.76	9.23	0.36	30.5