



## DC-直流轴流风扇 172x150x51mm-3

### 马达可选功能列表 (Available Functions)

#### 1. 马达保护 (Moto protection)

AS

#### 2. 信号输出 (Signal out put)

FG

RD


#### 3. 调速方式 (Speed control mode)

PWM


TC



风扇P-Q曲线 / Fan performance curve

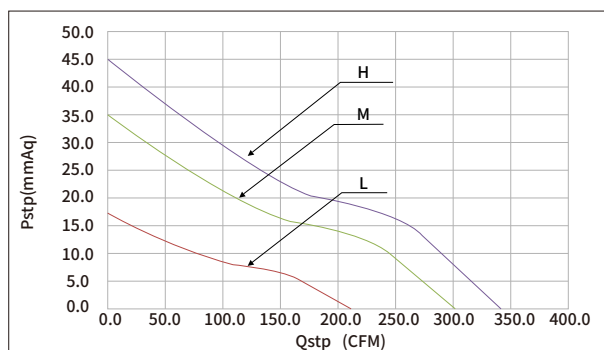

尺寸图 / DIMENSIONS DRAWING

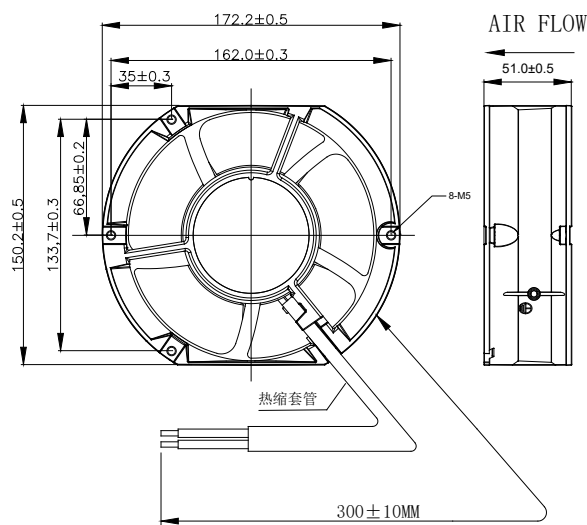

| Model        |          | Bearing | Rated Voltage | Startup Voltage | Current | Power | Speed | Air Flow |        | Static Pressure |       | Noise |
|--------------|----------|---------|---------------|-----------------|---------|-------|-------|----------|--------|-----------------|-------|-------|
| 型号           |          | 轴承      | 额定电压          | 启动电压            | 电流      | 功率    | 转速    | 风量       |        | 风压              |       | 噪音    |
| Part NO.     | Function | System  | VDC           | VDC             | A       | W     | RPM   | M³/min   | CFM    | mmH₂O           | INH₂O | dBA   |
| HDB17224HU-3 | -A       | Ball    | 24            | 18.0            | 2.44    | 58.56 | 5200  | 9.82     | 347.00 | 46.70           | 1.84  | 67.2  |
| HDB17224MU-3 | -A       | Ball    |               | 18.0            | 1.58    | 37.92 | 4500  | 8.49     | 300.00 | 35.00           | 1.38  | 64.0  |
| HDB17224LU-3 | -A       | Ball    |               | 18.0            | 0.57    | 13.68 | 3200  | 6.03     | 213.00 | 17.70           | 0.70  | 56.6  |
| HDB17248HU-3 | -A       | Ball    | 48            | 24.0            | 1.22    | 29.28 | 5200  | 9.82     | 347.00 | 46.70           | 1.84  | 67.2  |
| HDB17248MU-3 | -A       | Ball    |               | 24.0            | 0.79    | 18.96 | 4500  | 8.49     | 300.00 | 35.00           | 1.38  | 64.0  |
| HDB17248LU-3 | -A       | Ball    |               | 24.0            | 0.28    | 6.72  | 3200  | 6.03     | 213.00 | 17.70           | 0.70  | 56.6  |