



DC-直流轴流风扇 45x45x10mm

马达可选功能列表 (Available Functions)

1. 马达保护 (Moto protection)

AS

2. 信号输出 (Signal out put)

FG

RD

3. 调速方式 (Speed control mode)

PWM


TC




风扇单重: 14g (weight: 14g)



风扇P-Q曲线 / Fan performance curve

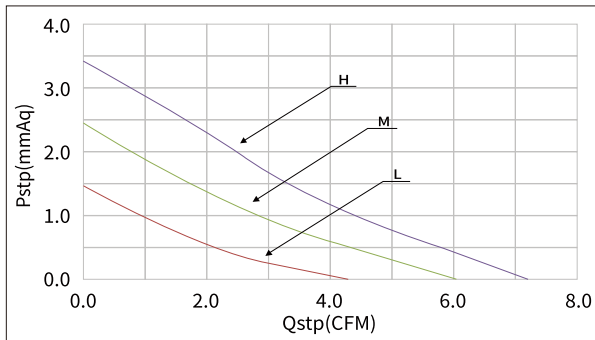

尺寸图 / Dimension drawing

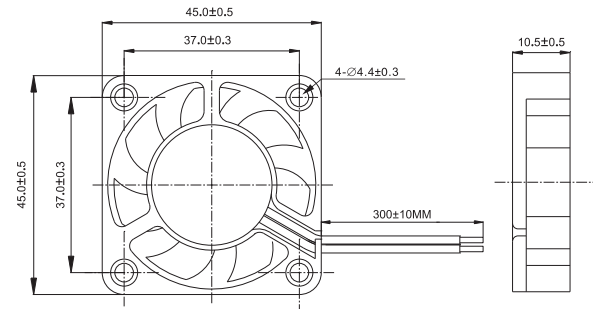

Model		Bearing	Rated Voltage	Startup Voltage	Current	Power	Speed	Air Flow		Static Pressure		Noise
型号		轴承	额定电压	启动电压	电流	功率	转速	风量		风压		噪音
Part NO.	Function	System	VDC	VDC	A	W	RPM	M ³ /min	CFM	mmH ₂ O	INH ₂ O	dBA
HDS4505HG		Sleeve	5	4.0	0.23	1.15	6000	0.21	7.25	3.41	0.13	30.6
HDS4505MG				4.0	0.20	1.00	5000	0.17	6.10	2.44	0.10	26.3
HDS4505LG				4.0	0.15	0.75	4000	0.12	4.34	1.45	0.06	21.0
HDB4505HG		Ball	5	4.0	0.23	1.15	6000	0.21	7.25	3.41	0.13	30.6
HDB4505MG				4.0	0.20	1.00	5000	0.17	6.10	2.44	0.10	26.3
HDB4505LG				4.0	0.15	0.75	4000	0.12	4.34	1.45	0.06	21.0
HDS4512HG		Sleeve	12	7.0	0.10	1.20	6000	0.21	7.25	3.41	0.13	30.6
HDS4512MG				7.0	0.09	1.08	5000	0.17	6.10	2.44	0.10	26.3
HDS4512LG				9.0	0.08	0.96	4000	0.12	4.34	1.45	0.06	21.0
HDB4512HG		Ball	12	7.0	0.10	1.20	6000	0.21	7.25	3.41	0.13	30.6
HDB4512MG				7.0	0.09	1.08	5000	0.17	6.10	2.44	0.10	26.3
HDB4512LG				9.0	0.08	0.96	4000	0.12	4.34	1.45	0.06	21.0
HDS4524HG		Sleeve	24	12.0	0.07	1.68	6000	0.21	7.25	3.41	0.13	30.6
HDS4524MG				12.0	0.06	1.44	5000	0.17	6.10	2.44	0.10	26.3
HDS4524LG				12.0	0.04	0.96	4000	0.12	4.34	1.45	0.06	21.0
HDB4524HG		Ball	24	12.0	0.07	1.68	6000	0.21	7.25	3.41	0.13	30.6
HDB4524MG				12.0	0.06	1.44	5000	0.17	6.10	2.44	0.10	26.3
HDB4524LG				12.0	0.04	0.96	4000	0.12	4.34	1.45	0.06	21.0

■ 提示1: 目录首页有功能的详细信息。 Notes1: The catalog have detail information in the front page for the functions.

■ 提示2: 如果您需要列表中的其他转速或电压或功能, 请与我们的业务联系。 Notes2: If you need other speed or voltage or function in the list, please contact our business.