



DC-鼓风机风扇 45x45x06mm

马达可选功能列表 (Available Functions)

1. 马达保护 (Moto protection)

AS

2. 信号输出 (Signal out put)

FG

RD

3. 调速方式 (Speed control mode)

PWM


TC




风扇单重: 10g (weight: 10g)



风扇P-Q曲线 / Fan performance curve

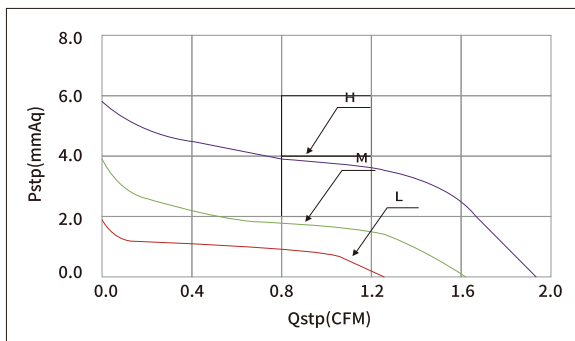

尺寸图 / Dimension drawing

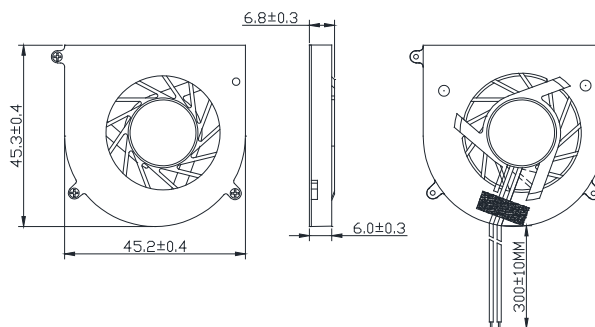

Model		Bearing	Rated Voltage	Startup Voltage	Current	Power	Speed	Air Flow		Static Pressure		Noise
Part NO.	Function	System	VDC	VDC	A	W	RPM	M³/min	CFM	mmH₂O	INH₂O	dBA
HBH4505HK		Hydraulic	5	4.0	0.25	1.25	5500	0.05	1.92	5.82	0.23	28.9
HBH4505MK				4.0	0.22	1.10	4500	0.05	1.61	3.95	0.16	23.5
HBH4505LK				4.0	0.15	0.75	3000	0.04	1.25	1.95	0.08	18.5
HBH4512HK		Hydraulic	12	6.0	0.15	1.80	5500	0.05	1.92	5.82	0.23	28.9
HBH4512MK				6.0	0.10	1.20	4500	0.05	1.61	3.95	0.16	23.5
HBH4512LK				6.0	0.07	0.84	3000	0.04	1.25	1.95	0.08	18.5