



DC-圆框风扇 30x30x10mm

马达可选功能列表 (Available Functions)

1. 马达保护 (Moto protection)

AS

2. 信号输出 (Signal out put)

FG

RD

3. 调速方式 (Speed control mode)

PWM


TC




风扇单重: 5g (weight: 5g)



风扇P-Q曲线 / Fan performance curve

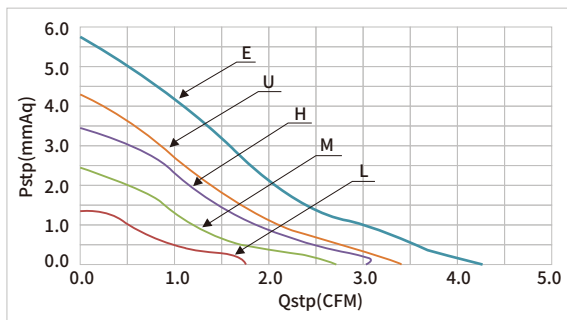

尺寸图 / DIMENSIONS DRAWING

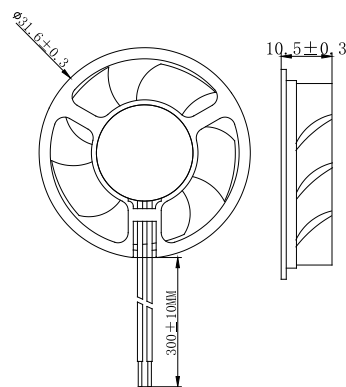

Model		Bearing	Rated Voltage	Startup Voltage	Current	Power	Speed	Air Flow		Static Pressure		Noise
型号		轴承	工作电压	启动电压	电流	功率	转速	风量		风压		噪音
Part NO.	Function	System	VDC	VDC	A	W	RPM	M³/min	CFM	mmH₂O	INH₂O	dBA
HDH0305HG		Hydraulic	5	4.0	0.30	1.50	9000	0.09	3.03	3.43	0.14	26.6
HDH0305MG				4.0	0.18	0.90	7500	0.08	2.72	2.42	0.10	23.6
HDH0305LG				4.0	0.12	0.60	6000	0.05	1.76	1.34	0.05	19.8
HDB0305HG		Ball		4.0	0.30	1.50	9000	0.09	3.03	3.43	0.14	26.6
HDB0305MG				4.0	0.18	0.90	7500	0.08	2.72	2.42	0.10	23.6
HDB0305LG				4.0	0.12	0.60	6000	0.05	1.76	1.34	0.05	19.8
HDH0312HG		Hydraulic	12	9.0	0.10	1.20	9000	0.09	3.03	3.43	0.14	26.6
HDH0312MG				9.0	0.08	0.96	7500	0.08	2.72	2.42	0.10	23.6
HDH0312LG				9.0	0.06	0.72	6000	0.05	1.76	1.34	0.05	19.8
HDB0312EG		Ball		9.0	0.21	2.52	12000	0.12	4.28	5.74	0.23	34.0
HDB0312UG				9.0	0.13	1.56	10500	0.10	3.42	4.28	0.17	31.4
HDB0312UG				9.0	0.10	1.20	9000	0.09	3.03	3.43	0.14	26.6
HDB0312MG				9.0	0.08	0.96	7500	0.08	2.72	2.42	0.10	23.6
HDB0312LG				9.0	0.06	0.72	6000	0.05	1.76	1.34	0.05	19.8
HDH0324HG		Hydraulic	24	12.0	0.07	1.68	9000	0.09	3.03	3.43	0.14	26.6
HDH0324MG				12.0	0.06	1.44	7500	0.08	2.72	2.42	0.10	23.6
HDH0324LG				12.0	0.04	0.96	6000	0.05	1.76	1.34	0.05	19.8
HDB0324HG		Ball		12.0	0.07	1.68	9000	0.09	3.06	3.43	0.14	26.6
HDB0324MG				12.0	0.06	1.44	7500	0.08	2.72	2.42	0.10	23.6
HDB0324LG				12.0	0.04	0.96	6000	0.05	1.76	1.76	0.05	19.8