



## DC-圆框风扇 92x92x25mm

### 马达可选功能列表 (Available Functions)

1. 马达保护 (Moto protection)

AS

2. 信号输出 (Signal out put)

FG

RD

3. 调速方式 (Speed control mode)


PWM

TC




风扇单重: 45g (weight: 45g)

### 风扇P-Q曲线 / Fan performance curve

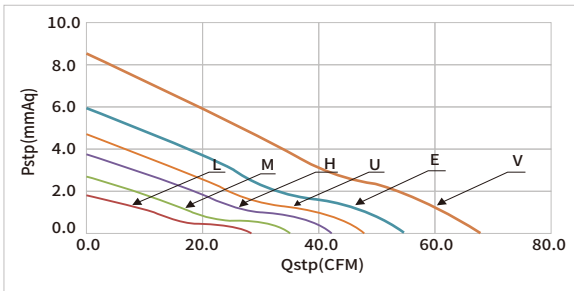

### 尺寸图 / DIMENSIONS DRAWING

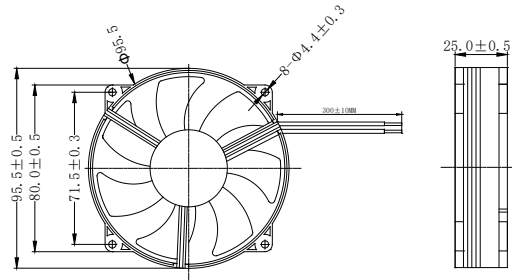

Model		Bearing	Rated Voltage	Startup Voltage	Current	Power	Speed	Air Flow		Static Pressure		Noise	
型号		轴承	工作电压	启动电压	电流	功率	转速	风量	风量	风压	风压	噪音	
Part NO.	Function	System	VDC	VDC	A	W	RPM	M <sup>3</sup> /min	CFM	mmH <sub>2</sub> O	INH <sub>2</sub> O	dBA	
HDH0905HA	-A	Hydraulic	5	4.0	0.30	1.50	2800	1.15	40.79	3.51	0.14	35.5	
HDH0905MA				4.0	0.25	1.25	2400	1.00	35.34	2.64	0.10	31.3	
HDH0905LA				4.0	0.19	0.95	2000	0.85	29.89	1.91	0.08	28.4	
HDB0905HA	-A	Ball		4.0	0.30	1.50	2800	1.15	40.79	3.51	0.14	35.5	
HDB0905MA				4.0	0.25	1.25	2400	1.00	35.34	2.64	0.10	31.3	
HDB0905LA				4.0	0.19	0.95	2000	0.85	29.89	1.91	0.08	28.4	
HDH0912HA		Hydraulic	12	6.0	0.30	2.76	2800	1.15	40.79	3.51	0.14	35.5	
HDH0912MA				6.0	0.25	2.28	2400	1.00	35.34	2.64	0.10	31.3	
HDH0912LA				9.0	0.19	1.92	2900	0.85	29.89	1.91	0.08	28.4	
HDB0912VA	-A	Ball		6.0	0.23	5.40	4200	1.77	62.52	7.06	0.28	47.5	
HDB0912EA	-A			6.0	0.19	4.80	3800	1.53	53.96	5.55	0.22	44.3	
HDB0912UA	-A			6.0	0.23	3.60	3200	1.32	46.71	4.28	0.17	39.7	
HDB0912HA		Ball	6.0	0.19	2.76	2800	1.15	40.79	3.51	0.14	35.5		
HDB0912MA			6.0	0.16	2.28	2400	1.00	35.34	2.64	0.10	31.3		
HDB0912LA			9.0	0.45	1.92	2000	0.85	29.89	1.91	0.08	28.4		
HDH0924HA			Hydraulic	24	12.0	0.11	2.64	3000	1.26	44.46	3.29	0.15	38.7
HDH0924MA					12.0	0.07	1.68	2500	1.04	36.84	2.41	0.11	33.0
HDH0924LA					18.0	0.05	1.20	2000	0.85	29.89	1.63	0.08	28.4
HDB0924UA	-A	Ball	12.0		0.13	3.12	3500	1.42	50.28	6.20	0.19	41.7	
HDB0924HA			12.0		0.11	2.64	3000	1.26	44.46	4.52	0.15	38.7	
HDB0924MA			12.0		0.07	1.68	2500	1.04	36.84	3.29	0.11	33.0	
HDB0924LA		Ball	18.0	0.05	1.20	2000	0.85	29.89	2.41	0.08	28.4		
HDH0948UA	-A		Hydraulic	48	24.0	0.11	5.28	3200	1.32	46.71	1.63	0.17	39.7
HDH0948HA					24.0	0.07	3.36	2800	1.15	40.79	6.20	0.14	35.5
HDH0948MA					24.0	0.05	2.40	2400	1.00	35.34	4.52	0.10	31.3
HDH0948LA					24.0	0.05	2.40	2000	0.85	29.89	3.29	0.08	28.4
HDB0948UA	-A				Ball	24.0	0.11	5.28	3200	1.32	46.71	2.41	0.17
HDB0948HA		24.0				0.07	3.36	2800	1.15	40.79	1.63	0.14	35.5
HDB0948MA		24.0	0.05	2.24		2400	1.00	35.34	2.41	0.10	31.3		
HDB0948LA			24.0	0.05	2.24	2000	0.85	29.89	1.63	0.08	28.4		