



DC-鼓风机风扇 90x90x20mm

马达可选功能列表 (Available Functions)

1. 马达保护 (Moto protection)

AS

2. 信号输出 (Signal out put)

FG

RD

3. 调速方式 (Speed control mode)

PWM


TC



风扇单重: 80g (weight: 80g)



尺寸图 / DIMENSIONS DRAWING

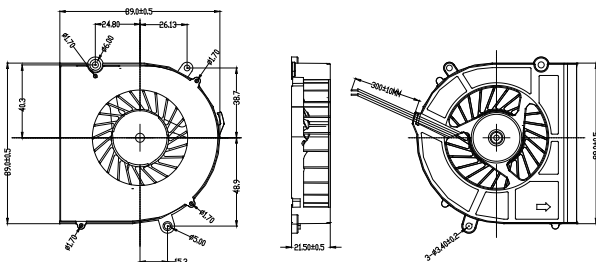

Model		Bearing	Rated Voltage	Startup Voltage	Current	Power	Speed	Air Flow		Static Pressure		Noise
型号		轴承	额定电压	启动电压	电流	功率	转速	风量		风压		噪音
Part NO.	Function	System	VDC	VDC	A	W	RPM	M³/min	CFM	mmH₂O	INH₂O	dBA
HBS0912HC		Sleeve	12	5.0	0.50	6.00	3500	0.55	19.45	20.35	0.80	42.0
HBS0912MC				5.0	0.30	3.60	2800	0.44	15.67	12.34	0.49	35.4
HBS0912LC				5.0	0.23	2.76	2200	0.35	12.23	6.52	0.26	28.0
HBB0912HC		Ball		5.0	0.50	6.00	3500	0.55	19.45	20.35	0.80	42.0
HBB0912MC				5.0	0.30	3.60	2800	0.44	15.67	12.34	0.49	35.4
HBB0912LC				5.0	0.23	2.76	2200	0.35	12.23	6.52	0.26	28.0
HBS0924HC		Sleeve	24	12.0	0.25	6.00	3500	0.55	19.45	20.35	0.80	42.0
HBS0924MC				12.0	0.16	3.84	2800	0.44	15.67	12.34	0.49	35.4
HBS0924LC				12.0	0.10	2.40	2200	0.35	12.23	6.52	0.26	28.0
HBB0924HC		Ball		12.0	0.25	6.00	3500	0.55	19.45	20.35	0.80	42.0
HBB0924MC				12.0	0.16	3.84	2800	0.44	15.67	12.34	0.49	35.4
HBB0924LC				12.0	0.10	2.40	2200	0.35	12.23	6.52	0.26	28.0