



DC-直流轴流风扇

50x50x12mm

马达可选功能列表 (Available Functions)

1. 马达保护 (Moto protection)

AS

2. 信号输出 (Signal out put)

FG

RD

3. 调速方式 (Speed control mode)

PWM


TC




风扇单重: 20g (weight: 20g)



风扇P-Q曲线 / Fan performance curve

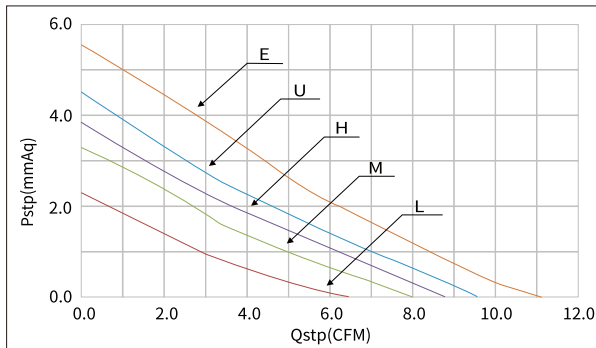

尺寸图 / Dimension drawing

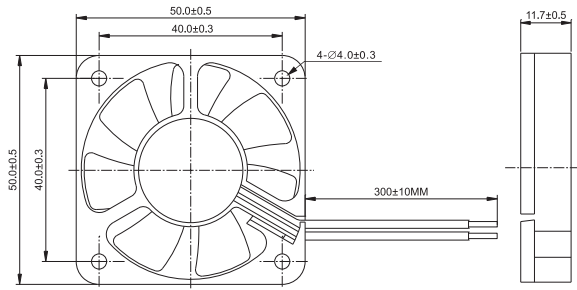

Model		Bearing	Rated Voltage	Startup Voltage	Current	Power	Speed	Air Flow		Static Pressure		Noise		
型号		轴承	额定电压	启动电压	电流	功率	转速	风量		风压		噪音		
Part NO.	Function	System	VDC	VDC	A	W	RPM	M³/min	CFM	mmH₂O	INHzO	dBA		
HDH0505EE	-A	Hydraulic	5	4.0	0.30	1.50	7500	0.31	11.09	5.58	0.22	43.6		
HDH0505UE				4.0	0.25	1.25	6500	0.27	9.52	4.52	0.18	39.9		
HDH0505HE				4.0	0.22	1.10	6000	0.25	8.81	3.86	0.15	37.9		
HDH0505ME				4.0	0.20	1.00	5500	0.23	7.98	3.29	0.13	35.9		
HDH0505LE				4.0	0.16	0.80	4500	0.18	6.39	2.29	0.09	32.3		
HDB0505EE	-A			4.0	0.30	1.50	7500	0.31	11.09	5.58	0.22	43.6		
HDB0505UE		Ball		4.0	0.25	1.25	6500	0.27	9.52	4.53	0.18	39.9		
HDB0505HE				4.0	0.22	1.10	6000	0.25	8.81	3.86	0.15	37.9		
HDB0505ME				4.0	0.20	1.00	5500	0.23	7.98	3.29	0.13	35.9		
HDB0505LE				4.0	0.16	0.80	4500	0.18	6.39	2.29	0.09	32.3		
HDH0512EE				Hydraulic	12	7.0	0.24	2.88	7500	0.31	11.09	5.58	0.22	43.6
HDH0512UE						7.0	0.20	2.40	6500	0.27	9.52	4.53	0.18	39.9
HDH0512HE		7.0	0.15			1.80	6000	0.25	8.81	3.86	0.15	37.9		
HDH0512ME		7.0	0.10			1.20	5500	0.23	7.98	3.29	0.13	35.9		
HDH0512LE		9.0	0.08			0.96	4500	0.18	6.39	2.29	0.09	32.3		
HDB0512EE		Ball				7.0	0.24	2.88	7500	0.31	11.09	5.58	0.22	43.6
HDB0512UE				7.0	0.20	2.40	6500	0.27	9.52	4.53	0.18	39.9		
HDB0512HE				7.0	0.15	1.80	6000	0.25	8.81	3.86	0.15	37.9		
HDB0512ME				7.0	0.10	1.20	5500	0.23	7.98	3.29	0.13	35.9		
HDB0512LE				9.0	0.08	0.96	4500	0.18	6.39	2.29	0.09	32.3		
HDH0524EE				Hydraulic	24	12.0	0.15	3.60	7500	0.31	11.09	5.58	0.22	43.6
HDH0524UE		12.0	0.12			2.88	6500	0.27	9.52	4.53	0.18	39.9		
HDH0524HE		12.0	0.10			2.40	6000	0.25	8.81	3.86	0.15	37.9		
HDH0524ME		12.0	0.09			2.16	5500	0.23	7.98	3.29	0.13	35.9		
HDH0524LE		12.0	0.06			1.44	4500	0.18	6.39	2.29	0.09	32.3		
HDB0524EE		Ball				12.0	0.15	3.60	7500	0.31	11.09	5.58	0.22	43.6
HDB0524UE				12.0	0.12	2.88	6500	0.27	9.52	4.53	0.18	39.9		
HDB0524HE				12.0	0.10	2.40	6000	0.25	8.81	3.86	0.15	37.9		
HDB0524ME				12.0	0.09	2.16	5500	0.23	7.98	3.29	0.13	35.9		
HDB0524LE				12.0	0.06	1.44	4500	0.18	6.39	2.29	0.09	32.3		

■ 提示1: 目录首页有功能的详细信息。 Notes1: The catalog have detail information in the front page for the functions.

■ 提示2: 如果您需要列表中的其他转速或电压或功能, 请我们的业务联系。 Notes2: If you need other speed or voltage or function in the list, please contact our business.