



## DC-直流轴流风扇 120x120x32mm

### 马达可选功能列表 (Available Functions)

1. 马达保护 (Moto protection)

AS

2. 信号输出 (Signal out put)

FG

RD

3. 调速方式 (Speed control mode)

PWM


TC




风扇单重: 215g (weight: 215g)



### 风扇P-Q曲线 / Fan performance curve

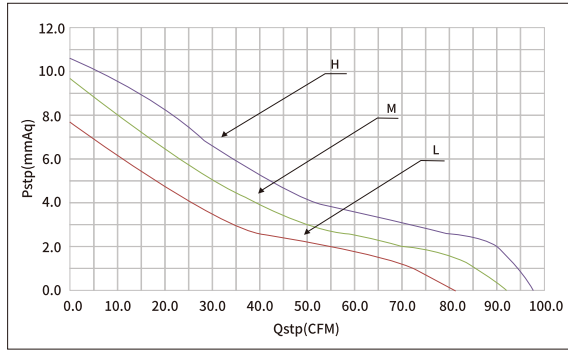

### 尺寸图 / Dimension drawing

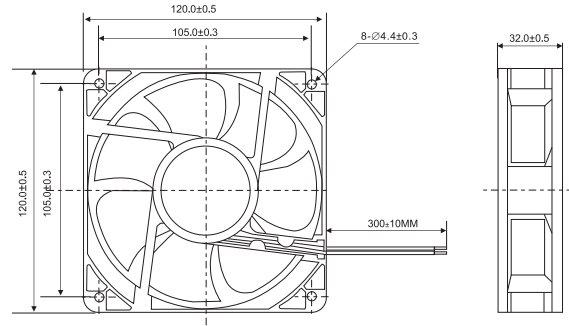

| Model     |          | Bearing | Rated Voltage | Startup Voltage | Current | Power | Speed | Air Flow |       | Static Pressure |       | Noise |
|-----------|----------|---------|---------------|-----------------|---------|-------|-------|----------|-------|-----------------|-------|-------|
| 型号        |          | 轴承      | 额定电压          | 启动电压            | 电流      | 功率    | 转速    | 风量       |       | 风压              |       | 噪音    |
| Part NO.  | Function | System  | VDC           | VDC             | A       | W     | RPM   | M³/min   | CFM   | mmH₂O           | INHzO | dBA   |
| HDS1212HY | -A       | Sleeve  | 12            | 5.0             | 0.60    | 7.20  | 3750  | 2.77     | 98.02 | 10.60           | 0.42  | 50.5  |
| HDS1212MY | -A       |         |               | 5.0             | 0.50    | 6.00  | 3300  | 2.62     | 92.52 | 9.66            | 0.38  | 45.2  |
| HDS1212LY | -A       |         |               | 5.0             | 0.32    | 3.84  | 2900  | 2.30     | 81.41 | 7.67            | 0.30  | 41.4  |
| HDB1212HY | -A       | Ball    |               | 5.0             | 0.60    | 7.20  | 3750  | 2.77     | 98.02 | 10.60           | 0.42  | 50.5  |
| HDB1212MY | -A       |         |               | 5.0             | 0.50    | 6.00  | 3300  | 2.62     | 92.52 | 9.66            | 0.38  | 45.2  |
| HDB1212LY | -A       |         |               | 5.0             | 0.32    | 3.84  | 2900  | 2.30     | 81.41 | 7.67            | 0.30  | 41.4  |
| HDS1224HY | -A       | Sleeve  | 24            | 12.0            | 0.28    | 6.72  | 3750  | 2.77     | 98.02 | 10.60           | 0.42  | 50.5  |
| HDS1224MY | -A       |         |               | 12.0            | 0.22    | 5.28  | 3300  | 2.62     | 92.52 | 9.66            | 0.38  | 45.2  |
| HDS1224LY | -A       |         |               | 12.0            | 0.16    | 3.84  | 2900  | 2.30     | 81.41 | 7.67            | 0.30  | 41.4  |
| HDB1224HY | -A       | Ball    |               | 12.0            | 0.28    | 6.72  | 3750  | 2.77     | 98.02 | 10.60           | 0.42  | 50.5  |
| HDB1224MY | -A       |         |               | 12.0            | 0.22    | 5.28  | 3300  | 2.62     | 92.52 | 9.66            | 0.38  | 45.2  |
| HDB1224LY | -A       |         |               | 12.0            | 0.16    | 3.84  | 2900  | 2.30     | 81.41 | 7.67            | 0.30  | 41.4  |
| HDS1248HY | -A       | Sleeve  | 48            | 24.0            | 0.18    | 8.64  | 3750  | 2.77     | 98.02 | 10.60           | 0.42  | 50.5  |
| HDS1248MY | -A       |         |               | 24.0            | 0.15    | 7.20  | 3300  | 2.62     | 92.52 | 9.66            | 0.38  | 45.2  |
| HDS1248LY | -A       |         |               | 24.0            | 0.13    | 6.24  | 2900  | 2.30     | 81.41 | 7.67            | 0.30  | 41.4  |
| HDB1248HY | -A       | Ball    |               | 24.0            | 0.18    | 8.64  | 3750  | 2.77     | 98.02 | 10.60           | 0.42  | 50.5  |
| HDB1248MY | -A       |         |               | 24.0            | 0.15    | 7.20  | 3300  | 2.60     | 92.50 | 9.66            | 0.38  | 45.2  |
| HDB1248LY | -A       |         |               | 24.0            | 0.13    | 6.24  | 2900  | 2.30     | 81.41 | 7.67            | 0.30  | 41.4  |